


REF:

Date:

5/25/2022

GENERATOR SET

MODEL	GSJD30125S-UL
FUEL TYPE	DIESEL
STANDBY POWER	125 KW
	156 KVA
FREQUENCY	60 HZ
VOLTAGE	208 V
PHASE	3 PH
CERTIFICATION	UL 2200

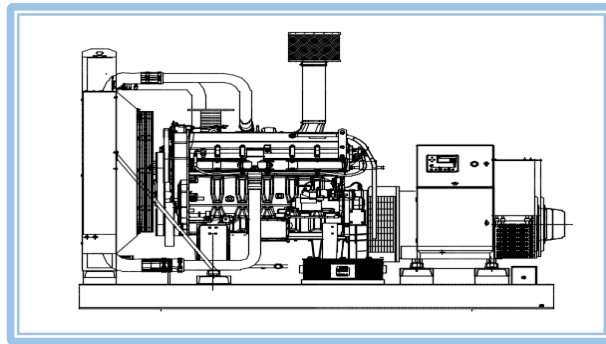

ENGINE

BRAND	JOHN DEERE
MODEL	4045HF285
EXHAUST EMISSIONS	EPA TIER 3
RPM	1800
STANDBY POWER	147/197 KWM/BHP
NUMBER OF CYLINDERS	4
ASPIRATION	TURBOCHARGED
GOVERNOR TYPE	ELECTRONIC
CONTROL VOLTAGE	12 V

ALTERNATOR

BRAND	STAMFORD
MODEL	UCI274F (Wnd-311)
PHASES	3
POWER FACTOR	0.8
INSULATION SYSTEM	H CLASS
CONTROL SYSTEM	SELF EXCITED
PROTECTION	IP 23
AVR MODEL	SX460
VOLTAGE REGULATION	+/-1.0

STANDAR ACCESORIES

CONTROLLER	DSE 7310
BATTERY	12 V
BATTERY CHARGER	DSE 9470
SILENCER	INDUSTRIAL
ANTI VIBRATION PADS	INCLUDED
PRE HEATER	HOTSTART TPS101GT10-003
BREAKER	400 A ABB

BASE TANK

250 GAL BASE TANK - UL142
AUTONOMY 24 HRS

ACOUSTIC ENCLOSURE

ACOUSTIC ENCLOSURE 125KW LEVEL 2